



eXtreme Grind [™] Grinding Wheels

- Extremely fast stock removal High performance CERAMIC grain.
- Dual layer structure:
 - Grinding layer with aggressive coarse ceramic grains
 - Supporting layer for better surface finish and smoother grinding
- High density, uniform grain structure is self-sharpening and provides a cooler cut and longer life.
- Labor cost savings grinds fast and much more efficiently compared to conventional grinding wheels.
- Can be used on steel, stainless steel, and high tensile metals.
- Best Choice for Heavy Material Removal Applications.
- Maximum performance on high power machines.





CERAMIC



METAL	CTAI	NLESS	CTFFI
MEIAI		NI F \ \	NIFFI
WILIAL	י סוחו	ITLLUU	OILLL




UPC	Size	Grit	Grain	RPM	Box Qty
4-1/2 x 1	/4				
54270	4-1/2 x 1/4 x 7/8	24	CER24-TBF	13,300	25
54271	4-1/2 x 1/4 x 5/8-11	24	CER24-TBF	13,300	10
5 x 1/4					
54272	5 x 1/4 x 7/8	24	CER24-TBF	12,250	25
54273	5 x 1/4 x 5/8-11	24	CER24-TBF	12,250	10
6 x 1/4					
54274	6 x 1/4 x 7/8	24	CER24-TBF	10,200	25
54275	6 x 1/4 x 5/8-11	24	CER24-TBF	10,200	10

UPC	Size	Grit	Grain	RPM	Box Qty
7 x 1/4					
54276	7 x 1/4 x 7/8	24	CER24-TBF	8,500	25
54277	7 x 1/4 x 5/8-11	24	CER24-TBF	8,500	10
9 x 1/4					
54278	9 x 1/4 x 7/8	24	CER24-TBF	6,600	25
54279	9 x 1/4 x 5/8-11	24	CER24-TBF	6,600	10

Contact your CGW sales representative or call our customer service line at 800.447.4248 for more information.

eXtreme Cut[™] Ceramic Cutting Wheels, Metal/Steel

- Extremely Fast Cutting high performance sharp CERAMIC grain.
- Advanced bonding system specially engineered to provide long life and fast cut.
- Labor cost savings much faster cutting rate compared to conventional cut-off wheels.
- Time cost saving fewer tool changes due to very long wheel life.
- Can be used on steel, and high tensile metals.
- Maximum performance on high power machines.

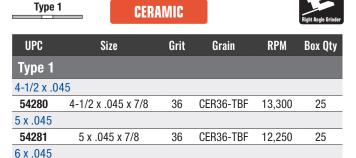

36

CER36-TBF



IУ	pe	27	

A	C		1
П	ZI	T_{\cdot}	

UPC	Size	Grit	Grain	RPM	Box Qty
Type 2	7				
4-1/2 x .0)45				
54283	4-1/2 x .045 x 7/8	36	CER36-TBF	13,300	25
54284	4-1/2 x .045 x 5/8-11	36	CER36-TBF	13,300	10
5 x .045					
54285	5 x .045 x 7/8	36	CER36-TBF	12,250	25
54286	5 x .045 x 5/8-11	36	CER36-TBF	12,250	10
6 x .045					
54287	6 x .045 x 7/8	36	CER36-TBF	10,200	25
54288	6 x .045 x 5/8-11	36	CER36-TBF	10,200	10

eXtreme Cut "SS" Ceramic Cutting Wheels, Stainless Steel

10,200

25

- Extremely Fast Cutting high performance sharp CERAMIC grain.
- Advanced bonding system specially engineered to provide long life and fast cut.
- Time cost saving fewer tool changes due to very long wheel life.
- Can be used on steel, stainless steel, and high tensile metals.
- Special Contaminant Free formula developed and optimized for stainless steel cutting (eXtreme Cut SS)



6 x .045 x 7/8

54282





UPC	Size	Grit	Grain	RPM	Box Qty
Type 1					
4-1/2 x .0	45				
54290	4-1/2 x .045 x 7/8	46	CER46-TBF	13,300	25
5 x .045					
54291	5 x .045 x 7/8	46	CER46-TBF	12,250	25
6 x .045					
54292	6 x .045 x 7/8	46	CER46-TBF	10,200	25



UPC	Size	Grit	Grain	RPM	Box Qty
Type 2	7				
4-1/2 x .0	045				
54293	4-1/2 x .045 x 7/8	46	CER46-TBF	13,300	25
54294	4-1/2 x .045 x 5/8-11	46	CER46-TBF	13,300	10
5 x .045					
54295	5 x .045 x 7/8	46	CER46-TBF	12,250	25
54296	5 x .045 x 5/8-11	46	CER46-TBF	12,250	10
6 x .045					
54297	6 x .045 x 7/8	46	CER46-TBF	10,200	25
54298	6 x .045 x 5/8-11	46	CER46-TBF	10,200	10

